

CARMENTA



**GTT 2 AKILLI SAAT
KULLANMA KILAVUZU**

Kullanma Kılavuzu

Türkçe versiyon



Uygulamayı indirmek ve kurmak için QR kodu tarayın.



HarmonyOS



Ürün ismi

Ana kontrol çipi

Radyo frekansı

Bluetooth versiyonu

Kalp sensörü

Enerji yönetimi

Ürün boyutu

Gövde malzemesi

Akıllı saat

RTL8762DK

2.4 G BLE

5.0

Epco Micro EM7128

Li-Po 3.7 V


46x46x12 mm

Çinko Alaşımı +IML+

Temperli cam

Ürünü Tanıyalım

1. Açma/kapatma için sağ tarafta bulunan dönen tuşa 3 saniye boyunca basın.
2. Ürünün temel yapısını aşağıda gösterildiği şekilde anlayabilirsiniz.

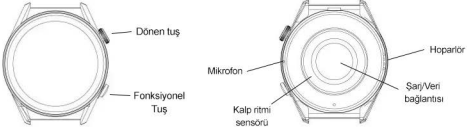

Tuş Fonksiyonları

Üst Tuş:

Ekranı açmak ve kapatmak için kullanılır. Ana ekrana dönmek için bu tuşa bir defa basınız. Saati kapatmak için veya saat kapalıyken saati açmak için bu tuşa uzun basmalısınız. Bu tuş aynı zamanda dönebilen bir tuştur. Menüye girdiğinizde bu tuşu çevirerek menüde daha hızlı hareket edebilirsiniz.

Alt Tuş:

Çoklu spor moduna erişim tuşudur. Spor modlarına erişim için bir defa basınız. Bu tuş aynı zamanda fonksiyonel bir tuştur ve bu tuşa farklı bir kısayol atayabilirsiniz. Saatin ekranı kapalıyken bu tuş ile de ekran açılabilir.

Saatin Bölümleri:

Mikrofon saatin sağ tarafında tuşların altında bulunan kısımdadır.

Hoparlör saatin sol tarafında bulunan çok delikli kısımdadır.

Kalp ritmi sensörü saatin bileğinize temas eden kısmında saatin alt tarafındadır.

Şarj ve veri bağlantısı ise saatin yine arka tarafında merkezde bulunan kısımdan yapılır.

Telefon İle Eşleştirme

1)Minumum IOS 9.0 ve Android 5.0 ile desteklenen akıllı telefonlar, bu akıllı saatin uygulaması yoluyla akıllı saatle eşleştirilebilir.

2)Uygulama kurulumu: Aşağıdaki Qr kodu okutun ve çıkan uygulamayı telefonunuza inidirip kurulumu gerçekleştirin. Uygulama kurulumu veya kullanımı sırasında lütfen tüm izinleri istemlere göre etkinleştirin, aksi takdirde uygulamanın ve saatin normal kullanımını etkileyebilir.

3) Uygulama manuel kurulumu : QR kodu okutarak kurulum yapmak istemezseniz manuel olarak da kurulum sağlayabilirsiniz. "**WearPro**" uygulamasını telefonunuzun uygulama marketinden indirin. "Cihaz" kısmına girin. "Cihaz ekle" seçeneğine dokunun. Telefonunuz bluetooth araması yaptıktan sonra Carmenta akıllı saatinizi seçerek bağlantıyı kurabilirsiniz.

Bağlanma başarılı olsa da olmasa da durumu menüde görebilirsiniz.

Sesli Görüşme Bağlantısı

Saatiniz kadrn ekranındayken ekranı yukarıdan aşağı doğru kaydırın. Saatin menüsünde yeşil sesli görüşme ikonuna tıklayın ve aç seçeneğine tıklayın. Daha sonra telefon ayarlarından bluetooth ayarlarına girin. Sonunda "Watch Audio" yazan özellik ile ek bağlantı kurun.

Not 1 : Sesli görüşmelerinizi saatinizden yapmak için 2. Bluetooth bağlantısının yapılması gerekmektedir. Bu özelliği saatinizden açıp kapatabilirsiniz.

Not 2 : Telefonunuzda izlediğiniz ve dinlediğiniz medya seslerinin saatinizden çıkmasını istemiyorsanız; sesli görüşme bağlantısını kurduktan sonra yan taraftaki ok işareti dokununuz. Alt tarafta çıkan "medya sesi" fonksiyonunu kapatın. İstediğiniz zaman açmak için aynı yolu izleyin.

Temel Kullanım

1. Saat açıldıktan sonra 10 saniye herhangi bir işlem yapılmazsa, ekran otomatik olarak kapanacak ve uyku moduna geçecektir. (Ekran zaman aşımı süresi "ayarlar-parlaklık-ekran kapanma süresi" kısmından düzenlenebilir.) Saatin ekranını açmak için istediğiniz herhangi bir tuşa basabilirsiniz.
2. Saatte çoklu ekran arayüzü bulunmaktadır. Ekran arayüzünü değiştirmek için ana ekrana uzun tıklayın, sağa ve sola kaydırarak veya yan tuşu döndürerek diğer arayüze geçebilirsiniz. Mevcut arayüzleri kullanabilirsiniz veya saatin uygulaması içerisinde istediğiniz arayüzü seçerek indirebilirsiniz.
3. Bluetooth bağlantı durumu, zaman, güç, rahatsız etmeyin modu, parlaklık ayarı ve diğer işlevleri bulmak için ekranı aşağı kaydırabilirsiniz.
4. Saat uygulamaya bağlı olduğunda ve bildirim izni açık olduğunda telefona gelen bildirimler ve aramalar saatinizde gözükecektir ve en fazla 10 bildirim kaydetme kapasitesi vardır. Tüm mesajlar silmek için en alta giderek sil simgesine dokunabilirsiniz.
5. Menüye girmek için ekranı yukarı kaydırabilirsiniz.

Mesaj Bildirimleri:

Saat telefon uygulaması "WearPro" ile bağlandıktan sonra telefondan bildirim izinlerini vermeniz gerekir. Bildirim izinleri verildikten sonra telefonun bildirim paneline düşen mesajlar saatinizin ekranına gelecektir. 10 Adet bildirim depolama kapasitesi vardır. 10'dan fazla gelen bildirimlerde yeni bildirimlere öncelik verilir. Hangi uygulamanın bildirimlerinin saatinize düşmesini istiyorsanız o uygulamaları "WearPro" uygulamasında mesajlar bölümünden belirleyebilirsiniz. Bildirimleri temizlemek için saatinizde bildirim sekmesinde en alta gelerek sil ikonuna tıklayabilirsiniz.

Telefon/Arama Geçmişi

Ana menüyü sola kaydırarak arama simgesine tıklayınız. Bluetooth arama simgesini aktif ederseniz telefonunuz ile saat arasında bluetooth bağlantısı yaparak saatinizden aramaları görebilir ve cevaplayabilirsiniz. Saatinizden bluetooth arama özelliğini aktif ettikten sonra telefonunuzun bluetooth ayarlarına girin ve "Watch Audio" başlıklı bluetooth cihazının bağlantısını gerçekleştirin. Toplamda 128 arama geçmişi depolama hafızası vardır. Saatinizden numara tuşlaması yaparak da arama yapabilirsiniz.

Fitness Verileri:

Fitness verileri standart olarak aktiftir. Adım, mesafe, kalori takibi gibi verilerinizi düzenli bir şekilde saatinizden takip edebilirsiniz. Veriler her günün sonunda sıfırlanır ve her gün için yeni veriler tutulur.

Spor Modları:

Saatinizde yürüyüş, koşu, koşu bandı, bisiklet, ip atlama ve bunun gibi daha birçok spor modu bulunmaktadır. Bir sporu yapmadan önce saatinizin spor kısmından yapacağınız sporu seçerek başlat butonuna tıkladığınız andan itibaren saatiniz sizler için o sporda attığınız adım, yaktığınız kalori ve geçirdiğiniz süre gibi en önemli verileri tutar. Bu verileri sporunuz bittikten sonra hem saatinizden hem de telefon uygulamasından görebilir ve takip edebilirsiniz.

Kalp Ritmi:

Saati bileğinize doğru bir şekilde taktıktan sonra menüden kalp ritmi simgesine tıklayarak kalp ritminizi ölçebilirsiniz.

EKG:

Menüden EKG simgesine tıklayarak EKG ölçümü yapabilirsiniz. Sonuçları hem saatinizden hem de uygulamadan detaylı şekilde görebilirsiniz.

Kan Oksijeni:

Menüden kan oksijeni simgesine tıklayarak ölçümü gerçekleştirebilirsiniz.

Kan Basıncı (Tansiyon):

Bileğinize saatin sıkı bir şekilde oturması önemlidir. Saatiniz bilginizden 2 parmak kadar uzakta olmalı ve sıkı bir şekilde takılı olmalıdır. Menüden tansiyon simgesine tıklayarak ölçüm yapabilirsiniz. Sonuçları hem saatinizden hem de uygulamadan görebilirsiniz.

Hesap Makinesi:

Menüden hesap makinesi simgesine tıklayarak basit hesaplamaları yapabilirsiniz.

Müzik Kontrolü:

Saatiniz telefonunuza bağlı iken telefonunuzda çalan müziği kontrol edebilirsiniz. Bluetooth bağlantısını yaptıktan sonra saatinizin müzik sekmesinde müzik kontrolünü yapabilirsiniz.

Uyku Takibi:

Saatiniz bileğinize düzgün şekilde takılı olduğunda saatiniz uyku takibinizi yapar. Bu takip verilerini telefon uygulamasından görüntüleyebilirsiniz.

Kronometre:

Zaman tutmak için kronometreye tıklayıp geçen süreyi kayıt edebilirsiniz.

Hava Durumu:

Saat telefon uygulamasına bağlı iken hava durumu bilgisi otomatik olarak saatinizde senkronize edilir. Hava durumu simgesine tıklayarak bulunduğunuz günün hava durumu bilgisini görebilirsiniz.

Telefonu Bul:

Telefonun nerede olduğunu bulamıyorsanız saatinizden telefonu bul simgesine tıklayarak telefonunuzda ses çalabilirsiniz. Bu sayede telefonun nerede olduğunu kolayca bulabilirsiniz.

Saati Bul:

Saatini bulamadığınızda saatiniz telefona bağlı ise telefon uygulamasından saati bul seçeneğine tıklayarak saatinizde ses çalabilirsiniz. Bu sayede saatinizi kolayca bulabilirsiniz.

Menü Seçenekleri:

Saatte 3'ten fazla menü seçeneği bulunmaktadır. Ayarlar- menü stilini seçerek menü türünü değiştirebilirsiniz.

Bileğinizi Kaldırınca Ekran Uyandırması:

Saatini bileğinize doğru şekilde takılı olduğunda bileğinizi yukarı doğru kaldırınca ekranın açılmasını sağlayan bir özellik vardır. Bu özelliği telefon uygulamasından "Uyandırmak için Bileği Kaldır" seçeneğini aktif ederek açabilirsiniz.

Rahatsız Etme Modu:

Saatini bildirim almak istemezseniz saatinizde rahatsız etme modu bulunmaktadır. Bu modu aktif ettikten sonra mesaj bildirimi, telefon çağrısı veya su hatırlatıcısı gibi durumlarda saatiniz hiçbir şekilde bildirim atmayacaktır. Bu özelliği aktif etmek için saatin ekranını yukarıdan aşağı kaydırın ve ay simgesine bir defa tıklayın.

Çalar Saat:


Saatini telefon uygulamasına bağlı iken uygulamadan alarm kısmına girerek saatinizde alarm kurabilirsiniz. Kurmuş olduğunuz saatte saatiniz sizleri titreşim ile uyandıracaktır.

Parola:

Saatinize parola ekleyebilirsiniz. Parolayı unutursanız standart parola şifresi 1819'dur.

Şarj

- 1.Şarj başlığını saatin üzerindeki yuvarlak bağlantı noktasına yerleştirin (aşağıdaki resimde gösterildiği gibi) ve sonra şarj cihazının USB bağlantısını 5V/1A değerlerinde kaliteli bir adaptöre takın.
- 2.Bazı şarj cihazlarında manyetik çekim, otomatik hizalama veya yapısal hizalama bulunur. Şarj kablosunun ve saatin şarj girişinde mıknatıslar bulunmaktadır. Doğru hizalama yaparak takmaya dikkat edin.
- 3.Saatin şarjı sıfıra yakın iken, tam olarak şarj olması 2 saattir. Ürün kutusundan ilk çıkarıldığında şarjı bitik olarak gelebilir. Ürün açılmıyorsa şarja takın ve 2 saat boyunca şarj edin. Şarj edildiği halde hala açılmıyorsa bizimle irtibat kurun.



Su Geçirmezlik

Ürün su sıçramalarına karşı dayanıklıdır fakat tamamen su geçirmez değildir. Saat kolunuzda takılı iken; denize, havuza ve duşa girmeniz tavsiye edilmez.

Ürünün doğrudan su ile teması halinde ürün garanti dışı kalmaktadır.

Saatin su haricinde; sabun, deterjan, şampuan, krem, losyon, alkol, temizleyici ve aşındırıcı kimyasallar vb. ile temas etmesi halinde su geçirmezliği bozulabilir.

Bu gibi kimyasallar ile temas eden cihazlar garanti dışı kalmaktadır.

NFC Özelliđi

NFC kablosuz fonksiyonu ile, temel olarak erişim kontrolü için kullanılır (oda, asansör, otopark girişı, kaydırma kartları vb.).

İlgili işlevler, cep telefonunuzun nfc'yi ve ilgili işlevsel uygulamaları desteklemesi gereklidir.

1.Erişim kartı özelliđi

Bu saat, sıradan erişim kartları veya erişim anahtarlarının yerini alabilecek bir NFC etiketine eşdeğerdur.

2. NFC kısayolları veya diğerk uygulamalar

Cep telefonunuzdaki diğerk NFC özellikli uygulamaları kullanmak için de kullanabilirsiniz (Apple cep telefonları için kısayol komutları gibi, ayrıntılar için lütfen cep telefonunuzun NFC ile ilgili talimatlarına ve uygulamalarına bakın).

Tuşı talimatı

Ekranı açmak için yuvarlak tuşa kısa süreli basın. Ana menüye girmek için yuvarlak tuşa basın, geri dönmek için tekrar basın. Kısayol menüsü arayüzünde menü stillerini değiştirmek için tıklayın. Kadran yakınlaşturma ve fonksiyonları değiştirmek için yan tuşu çevirin. Genel çalışma ekranında geri dönmek için yuvarlak düğmeye basın.

Açma tuşu: Cihazı çalıştırmak için yuvarlak tuşa uzun basın. Ekranı açmak için kısa basın.

Kısayol menüsü

Telefon bağlantı durumu

Ses Bluetooth değişimi

Şifre

DND modu

Batarya

Menü tipi değişimi

Parlaklık ayarı

Flaş ışığı

CARMENTA



GTT 2 SMARTWATCH USER MANUAL

User Manual

English Version



Scan the QR Code to
download the app.



HarmonyOS




Product Name
Main Control Chip
Radio Frequency
Bluetooth Version
Heart Sensor
Energy Management
Product Size
Materials

Smart watch
RTL8762DK
2.4 G BLE
5.0
Epcu Micro EM7128
Li-Po 3.7 V
46x46x12 mm
Zinc Alloy +IML+
tempered glass

Understand Product

1. Press the rotary button on the right side for 3 seconds to turn on/off.
2. You can understand the basic structure of the product as shown below.

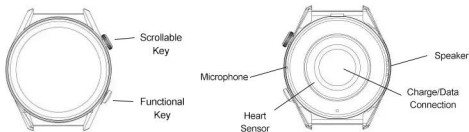

Key Functions

Upper Key:

It is used to turn the screen on and off. Press this button once to return to the main screen. You must long press this button to turn off the clock or to turn on the clock when the clock is off. This key is also a rotatable key. When you enter the menu, you can move faster in the menu by turning this key.

Lower Key:

It is the access button to multi-sport mode. Press once to access sports modes. This key is also a functional key and you can assign a different shortcut to this key. When the watch screen is off, the screen can be turned on with this button.

Parts of the Watch:

The microphone is located on the right side of the watch, below the buttons.

The speaker is in the multi-hole part on the left side of the clock.

The heart rhythm sensor is on the underside of the watch, on the part of the watch that touches your wrist.

Charging and data connections are made from the central part on the back of the watch.

Pairing With Phone

1)Smartphones supported with minimum IOS 9.0 and Android 5.0 can be paired with the smartwatch via this smartwatch's app.

2)Application Setup: Scan the Qr code below and download the resulting application to your phone and install it. During app installation or use, please enable all permissions according to the prompts, otherwise it may affect the normal use of the app and the watch.

3) Application Manual Setup: If you do not want to install by scanning the QR code, you can also install it manually. Download the "WearPro" application from your phone's application store. Enter the "Device" section. Tap "Add device". After your phone searches for Bluetooth, you can establish the connection by selecting your Carmenta smart watch.

Whether the connection is successful or not, you can see the status in the menu.

Voice Call Connection

While your watch is on the face screen, swipe the screen from top to bottom. Click on the green voice call icon in the watch menu and click on open. Then enter the bluetooth settings from the phone settings. Make an additional connection with the feature that says "Watch Audio" at the end.

Note 1 : In order to make voice calls from your watch, a 2nd Bluetooth connection is required. You can turn this feature on or off from your watch.

Note 2 : If you do not want the media sounds you watch and listen to on your phone to come out of your watch; After establishing the voice call connection, tap the arrow sign on the side. Turn off the "media sound" function that appears at the bottom. Follow the same path to turn it on whenever you want.

Basic Use

1. If there is no operation for 10 seconds after the watch is turned on, the screen will automatically turn off and go into sleep mode. (The screen timeout period can be adjusted in the "settings-brightness-screen off time" section.) You can press any key you want to turn on the screen of the watch.
2. The watch has a multi-screen interface. Long click on the home screen to change the screen interface, you can switch to the other interface by swiping right and left or rotating the side key. You can use existing interfaces or download the interface you want from the watch application.
3. You can scroll down the screen to find Bluetooth connection status, time, power, do not disturb mode, brightness adjustment and other functions.
4. When the watch is connected to the application and the notification permission is turned on, notifications and calls coming to the phone will appear on your watch and it has the capacity to save up to 10 notifications. To delete all messages, you can scroll to the bottom and tap the delete icon.
5. You can swipe the screen up to enter the menu.

Message Notifications:

After connecting the watch with the phone application "WearPro", you need to grant notification permissions from the phone. After notification permissions are granted, the messages sent to the notification panel of the phone will appear on the screen of your watch. It has a storage capacity of 10 notifications. In case of more than 10 notifications, new notifications are given priority. You can specify which applications you want to receive notifications from on your watch from the messages section in the "WearPro" application. Notification on your watch to clear notifications. You can scroll to the bottom of the tab and click on the delete icon.

Phone/Call History

Scroll the main menu to the left and click on the search icon. If you activate the Bluetooth call icon, you can see and answer calls on your watch by making a Bluetooth connection between your phone and the watch. Bluetooth calling feature from your watch. After activating it, go to your phone's Bluetooth settings and connect the Bluetooth device titled "Watch Audio". There are a total of 128 call history storage memories. You can also make a call by dialing a number on your watch.

Fitness Data:

Fitness data is active as standard. You can regularly track your data such as steps, distance and calories on your watch. The data is reset at the end of each day and new data is kept for each day.

Sports Modes:

Your watch has many sports modes such as walking, running, treadmill, cycling, rope jumping and many more. Before doing a sport, you select the sport you will do from the sport section of your watch and from the moment you click on the start button, your watch will be in that sport for you. It keeps the most important data such as the steps you take, the calories you burn and the time you spend. You can view and follow this data both on your watch and on the phone application after your exercise is over.

Heart Rhythm:

After wearing the watch correctly on your wrist, you can measure your heart rhythm by clicking the heart rhythm icon from the menu.

ECG:

You can measure ECG by clicking the ECG icon from the menu. You can see the results in detail both on your watch and from the application.

Blood Oxygen:

You can perform the measurement by clicking on the blood oxygen icon from the menu.

Blood Pressure:

It is important that the watch fits snugly on your wrist. Your watch should be about 2 fingers away from your wrist and should be worn securely. You can take measurements by clicking on the blood pressure icon from the menu. You can see the results both on your watch and from the app.

Calculator:

You can perform simple calculations by clicking the calculator icon from the menu.

Music Control:

While your watch is connected to your phone, you can control the music playing on your phone. After making the Bluetooth connection, you can control the music in the music tab of your watch.

Sleep Tracking:

When your watch is properly worn on your wrist, your watch tracks your sleep. You can view this tracking data from the phone app.

Stopwatch:

To keep time, you can click on the stopwatch and record the elapsed time.

Weather:

Weather information is automatically synced to your watch while the watch is connected to the phone app. You can see the current day's weather information by clicking on the weather icon.

Find Phone:

If you can't find where your phone is, find it on your watch, you can play sound on your phone by clicking the icon. In this way, you can easily find where the phone is.

Find Watch:

When you cannot find your watch, if your watch is connected to your phone, you can play a sound on your watch by clicking the find watch option from the phone application. In this way, you can easily find your watch.

Menu Options:

There are more than 3 menu options per hour. You can change the menu type by selecting Settings - menu style.

Screen Wake Up When You Raise Your Wrist:

When your watch is properly worn on your wrist, there is a feature that allows the screen to turn on when you lift your wrist upwards. You can turn on this feature by activating the "Raise Wrist to Wake" option from the phone application.

Do Not Disturb Mode:

If you do not want to receive notifications from your watch, your watch has a do not disturb mode. After activating this mode, your watch will not send any notifications such as message notifications, phone calls or water reminders. To activate this feature, the watch. Swipe down from the top of the screen and click the moon icon once.

Alarm:


While your watch is connected to the phone application, you can set an alarm on your watch by entering the alarm section from the application. Your watch will wake you up with vibration at the time you set.

Password:

You can add a password to your watch. If you forget the password, the standard password password is 1819.

Charge

1. Place the charging head into the circular port on the watch (as shown in the picture below), and then plug the USB connection of the charger into a quality adapter rated at 5V/1A.
2. Some chargers have magnetic attraction, automatic alignment or structural alignment. There are magnets in the charging port of the charging cable and the watch. Be careful to install it with correct alignment.
3. While the watch's charge is close to zero, it takes 2 hours to fully charge it. When the product is first taken out of the box, it may come with a dead battery. If the product does not turn on, plug it into the charger and charge it for 2 hours. If it still does not turn on after being charged, contact us.



Waterproof

The product is splash resistant but not completely waterproof. While the watch is on your wrist; It is not recommended to enter the sea, pool or shower. If the product comes into direct contact with water, the product will be out of warranty. Apart from the water of the watch; soap, detergent, shampoo, cream, lotion, alcohol, cleaner and corrosive chemicals etc. In case of contact with water, its waterproofness may be impaired. Devices that come into contact with such chemicals are void of warranty.

NFC

With NFC wireless function, mainly used for access control (room, elevator, car park entrance, swipe cards, etc.).

Related functions, your mobile phone is required to support NFC and relevant functional applications.

1.Access Card Feature

This watch is equivalent to an NFC tag that can replace ordinary access cards or access keys.

2. NFC shortcuts or other apps

You can also use it to use other NFC-enabled applications on your mobile phone (such as shortcut commands for Apple mobile phones, please refer to the mobile phone's NFC-related instructions and applications for details).

Key Instructions

Briefly press the round key to turn on the screen. Press the round button to enter the main menu, press again to return. Click to change menu styles in the shortcut menu interface. Turn the side switch to zoom the dial and change functions. Press the round button to return to the general operation screen.

Power Button: Long press the round button to turn on the device. Short press to turn on the screen.

Shortcut Menu

Shortcut menu

Phone connection status

Audio Bluetooth replacement

Password

DND mode

Battery

Menu type change

Brightness adjustment

Flash light