

# C★ARMENTA



## X9 KULLANMA KILAVUZU

# Kullanma Kılavuzu

Türkçe versiyon



Uygulamayı indirmek ve kurmak için QR kodu tarayın.



HarmonyOS



**Ürün ismi**

**Ana kontrol çipi**

**Radyo frekansı**

**Bluetooth versiyonu**

**Kalp sensörü**

**Enerji yönetimi**

**Ürün boyutu**

**Gövde malzemesi**

Akıllı saat

RTL8762DK

2.4 G BLE

5.0

Epco Micro EM7128


Li-Po 3.7 V

45x38x12 mm

Alüminyum

# Ürünü Tanıyalım

1. Açma/kapatma için sağ tarafta bulunan dönen tuşa 3 saniye boyunca basın.
2. Ürünün temel yapısını aşağıda gösterildiği şekilde anlayabilirsiniz.



## Tuş Fonksiyonları

### Üst Tuş:

Ekranı açmak ve kapatmak için kullanılır. Ana ekrana dönmek için bu tuşa bir defa basınız. Saati kapatmak için veya saat kapalıyken saati açmak için bu tuşa uzun basmalısınız. Bu tuş aynı zamanda dönebilen bir tuştur. Menüye girdiğinizde bu tuşu çevirerek menüde daha hızlı hareket edebilirsiniz.

### Alt Tuş:

Çoklu spor moduna erişim tuşudur. Spor modlarına erişim için bir defa basınız. Bu tuş aynı zamanda fonksiyonel bir tuştur ve bu tuşa farklı bir kısayol atayabilirsiniz. Saatin ekranı kapalıyken bu tuş ile de ekran açılabilir.


## Saatin Bölümleri:

Mikrofon saatin sağ tarafında tuşların altında bulunan kısımdadır.

Hoparlör saatin sol tarafında bulunan çok delikli kısımdadır.

Kalp ritmi sensörü saatin bileğinize temas eden kısmında saatin alt tarafındadır.

Şarj ve veri bağlantısı ise saatin yine arka tarafında merkezde bulunan kısımdan yapılır.



# Telefon İle Eşleştirme

1) Minimum IOS 9.0 ve Android 5.0 ile desteklenen akıllı telefonlar, bu akıllı saatin uygulaması yoluyla akıllı saatle eşleştirilebilir.

**2) Uygulama kurulumu:** Aşağıdaki Qr kodu okutun ve çıkan uygulamayı telefonunuza indirip kurulumu gerçekleştirin. Uygulama kurulumu veya kullanımı sırasında lütfen tüm izinleri istemlere göre etkinleştirin, aksi takdirde uygulamanın ve saatin normal kullanımını etkileyebilir.

**3) Uygulama manuel kurulumu :** QR kodu okutarak kurulum yapmak istemezseniz manuel olarak da kurulum sağlayabilirsiniz. “**QiFit**” uygulamasını telefonunuzun uygulama marketinden indirin. “Cihaz” kısmına girin. “Cihaz ekle” seçeneğine dokunun. Telefonunuz bluetooth araması yaptıktan sonra Carmenta akıllı saatinizi seçerek bağlantıyı kurabilirsiniz.

Bağlanma başarılı olsa da olmasa da durumu menüde görebilirsiniz.

## Sesli Görüşme Bağlantısı

Saatiniz kadrın ekranındayken ekranı yukarıdan aşağı doğru kaydırın. Saatin menüsünde yeşil sesli görüşme ikonuna tıklayın ve aç seçeneğine tıklayın. Daha sonra telefon ayarlarından bluetooth ayarlarına girin. Sonunda “Watch Audio” yazan özellik ile ek bağlantı kurun.

**Not 1 :** Sesli görüşmelerinizi saatinizden yapmak için 2. Bluetooth bağlantısının yapılması gerekmektedir. Bu özelliği saatinizden açıp kapatabilirsiniz.

**Not 2 :** Telefonunuzda izlediğiniz ve dinlediğiniz medya seslerinin saatinizden çıkmasını istemiyorsanız; sesli görüşme bağlantısını kurduktan sonra yan taraftaki ok işareti dokununuz. Alt tarafta çıkan “medya sesi” fonksiyonunu kapatın. İsteddiğiniz zaman açmak için aynı yolu izleyin.

# Temel Kullanım

1. Saat açıldıktan sonra 10 saniye herhangi bir işlem yapılmazsa, ekran otomatik olarak kapanacak ve uyku moduna geçecektir. (Ekran zaman aşımı süresi “ayarlar-parlaklık-ekran kapanma süresi” kısmından düzenlenebilir.) Saatin ekranını açmak için istediğiniz herhangi bir tuşa basabilirsiniz.
2. Saatte çoklu ekran arayüzü bulunmaktadır. Ekran arayüzünü değiştirmek için ana ekrana uzun tıklayın, sağa ve sola kaydırarak veya yan tuşu döndürerek diğer arayüze geçebilirsiniz. Mevcut arayüzleri kullanabilirsiniz veya saatin uygulaması içerisinde istediğiniz arayüzü seçerek indirebilirsiniz.
3. Bluetooth bağlantı durumu, zaman, güç, rahatsız etmeyin modu, parlaklık ayarı ve diğer işlevleri bulmak için ekranı aşağı kaydırabilirsiniz.
4. Saat uygulamaya bağlı olduğunda ve bildirim izni açık olduğunda telefona gelen bildirimler ve aramalar saatinizde gözükecektir ve en fazla 10 bildirim kaydetme kapasitesi vardır. Tüm mesajlar silmek için en alta giderek sil simgesine dokunabilirsiniz.
5. Menüye girmek için ekranı yukarı kaydırabilirsiniz.

## Mesaj Bildirimleri:

Saat telefon uygulaması “QiFit” ile bağlandıktan sonra telefonda bildirim izinlerini vermeniz gerekir. Bildirim izinleri verildikten sonra telefonun bildirim paneline düşen mesajlar saatinizin ekranına gelecektir. Hangi uygulamanın bildirimlerinin saatinize düşmesini istiyorsanız o uygulamaları “QiFit” uygulamasında mesajlar bölümünden belirleyebilirsiniz. Bildirimleri temizlemek için saatinizde bildirim sekmesinde en alta gelerek sil ikonuna tıklayabilirsiniz.

## Telefon/Arama Geçmişi

Ana menüyü sola kaydırarak arama simgesine tıklayınız. Bluetooth arama simgesini aktif ederseniz telefonunuz ile saat arasında bluetooth bağlantısı yaparak saatinizden aramaları görebilir ve cevaplayabilirsiniz. Saatinizden bluetooth arama özelliğini aktif ettikten sonra telefonunuzun bluetooth ayarlarına girin ve “Watch Audio” başlıklı bluetooth cihazının bağlantısını gerçekleştirin. Toplamda 128 arama geçmişi depolama hafızası vardır. Saatinizden numara tuşlaması yaparak da arama yapabilirsiniz.

### **Fitness Verileri:**

Fitness verileri standart olarak aktiftir. Adım, mesafe, kalori takibi gibi verilerinizi düzenli bir şekilde saatinizden takip edebilirsiniz. Veriler her günün sonunda sıfırlanır ve her gün için yeni veriler tutulur.

### **Spor Modları:**

Saatinizde yürüyüş, koşu, koşu bandı, bisiklet, ip atlama ve bunun gibi 100+ spor modları bulunmaktadır. Bir sporu yapmadan önce saatinizin spor kısmından yapacağınız sporu seçerek başlat butonuna tıkladığınız andan itibaren saatiniz sizler için o sporda attığınız adım, yaktığınız kalori ve geçirdiğiniz süre gibi en önemli verileri tutar. Bu verileri sporunuz bittikten sonra hem saatinizden hem de telefon uygulamasından görebilir ve takip edebilirsiniz.

### **Kalp Ritmi:**

Saati bileğinize doğru bir şekilde taktıktan sonra menüden kalp ritmi simgesine tıklayarak kalp ritminizi ölçebilirsiniz.

### **Kan Oksijeni:**

Menüden kan oksijeni simgesine tıklayarak ölçümü gerçekleştirebilirsiniz.

### **Hesap Makinesi:**

Menüden hesap makinesi simgesine tıklayarak basit hesaplamaları yapabilirsiniz.

### **Müzik Kontrolü:**

Saatiniz telefonunuza bağlı iken telefonunuzda çalan müziği kontrol edebilirsiniz. Bluetooth bağlantısını yaptıktan sonra saatinizin müzik sekmesinde müzik kontrolünü yapabilirsiniz.

### **Uyku Takibi:**

Saatiniz bileğinize düzgün şekilde takılı olduğunda saatiniz uyku takibinizi yapar. Bu takip verilerini telefon uygulamasından görüntüleyebilirsiniz.

### **Kronometre:**

Zaman tutmak için kronometreye tıklayıp geçen süreyi kayıt edebilirsiniz.

### **Hava Durumu:**

Saat telefon uygulamasına bağlı iken hava durumu bilgisi otomatik olarak saatinizde senkronize edilir. Hava durumu simgesine tıklayarak bulunduğunuz günün hava durumu bilgisini görebilirsiniz.

### **Telefonu Bul:**

Telefonun nerede olduğunu bulamıyorsanız saatinizden telefonu bul simgesine tıklayarak telefonunuzda ses çalabilirsiniz. Bu sayede telefonun nerede olduğunu kolayca bulabilirsiniz.

**Saati Bul:**

Saatinizi bulamadığınızda saatiniz telefona bağlı ise telefon uygulamasından saati bul seçeneğine tıklayarak saatinizde ses çalabilirsiniz. Bu sayede saatinizi kolayca bulabilirsiniz.

**Always On Display:**

Saatte sürekli açık ekran özelliği bulunmaktadır. Bu özelliği aktif etmek için sırasıyla ayarlar - ekran - ekran zaman aşımı - sürekli açık seçeneğini seçebilirsiniz.

**Menü Seçenekleri:**

Saatte 3'ten fazla menü seçeneği bulunmaktadır. Ayarlar- menü stilini seçerek menü türünü değiştirebilirsiniz.

**Bileğinizi Kaldırınca Ekran Uyandırması:**

Saatınız bileğinize doğru şekilde takılı olduğunda bileğinizi yukarı doğru kaldırınca ekranın açılmasını sağlayan bir özellik vardır. Bu özelliği telefon uygulamasından "Uyandırmak için Bileği Kaldır" seçeneğini aktif ederek açabilirsiniz.

**Rahatsız Etme Modu:**

Saatinizden bildirim almak istemezseniz saatinizde rahatsız etme modu bulunmaktadır. Bu modu aktif ettikten sonra mesaj bildirimi, telefon çağrısı veya su hatırlatıcısı gibi durumlarda saatiniz hiçbir şekilde bildirim atmayacaktır. Bu özelliği aktif etmek için saatin ekranını yukarıdan aşağı kaydırın ve ay simgesine bir defa tıklayın.

**Çalar Saat:**


Saatiniz telefon uygulamasına bağlı iken uygulamadan alarm kısmına girerek saatinizde alarm kurabilirsiniz. Kurmuş olduğunuz saatte saatiniz sizleri titreşim ile uyandıracaktır.

**Parola:**

Saatinize parola ekleyebilirsiniz. Parolayı unutursanız standart parola şifresi 1819'dur.

# Şarj

- 1.Şarj başlığını saatin üzerindeki yuvarlak bağlantı noktasına yerleştirin (aşağıdaki resimde gösterildiği gibi) ve sonra şarj cihazının USB bağlantısını 5V/1A değerlerinde kaliteli bir adaptöre takın.
- 2.Bazı şarj cihazlarında manyetik çekim, otomatik hizalama veya yapısal hizalama bulunur. Şarj kablusunun ve saatin şarj girişinde mıknatıslar bulunmaktadır. Doğru hizalama yaparak takmaya dikkat edin.
- 3.Saatin şarjı sıfıra yakın iken, tam olarak şarj olması 2 saattir. Ürün kutusundan ilk çıkarıldığında şarjı bitik olarak gelebilir. Ürün açılmıyorsa şarja takın ve 2 saat boyunca şarj edin. Şarj edildiği halde hala açılmıyorsa bizimle irtibat kurun.

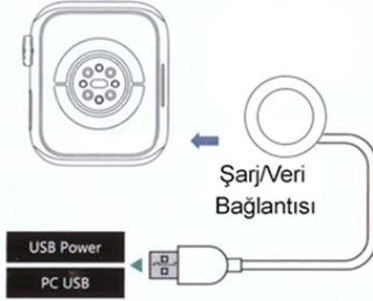

# Su Geçirmezlik

Ürün su sıçramalarına karşı dayanıklıdır fakat tamamen su geçirmez değildir. Saat kolunuzda takılı iken; denize, havuza ve duşa girmeniz tavsiye edilmez.

**Ürünün doğrudan su ile teması halinde ürün garanti dışı kalmaktadır.**

Saatin su haricinde; sabun, deterjan, şampuan, krem, losyon, alkol, temizleyici ve aşındırıcı kimyasallar vb. ile temas etmesi halinde su geçirmezliği bozulabilir.

Bu gibi kimyasallar ile temas eden cihazlar garanti dışı kalmaktadır.

# NFC Özelliđi

NFC kablosuz fonksiyonu ile, temel olarak erişim kontrolü için kullanılır

(oda, asansör, otopark girişı, kaydırma kartları vb.).

İlgili işlevler, cep telefonunuzun nfc'yi ve ilgili işlevsel uygulamaları desteklemesi gereklidir.

## 1.Erişim kartı özelliđi

Bu saat, sıradan erişim kartları veya erişim anahtarlarının yerini alabilecek bir NFC etiketine eşdeğerdır.

## 2. NFC kısayolları veya diğır uygulamalar

Cep telefonunuzdaki diğır NFC özellikli uygulamaları kullanmak için de kullanabilirsiniz (Apple cep telefonları için kısayol komutları gibi, ayrıntılar için lütfen cep telefonunun NFC ile ilgili talimatlarına ve uygulamalarına bakın).

## Tuş talimatı

Ekranı açmak için yuvarlak tuşa kısa süreli basın. Ana menüye girmek için yuvarlak tuşa basın, geri dönmek için tekrar basın. Kısayol menüsü arayüzünde menü stillerini değiştirmek için tıklayın. Kadran yakınlaştıırma ve fonksiyonları değiştirmek için yan tuşu çevirin. Genel çalışma ekranında geri dönmek için yuvarlak düğmeye basın.

**Açma tuşu:** Cihazı çalıştırmak için yuvarlak tuşa uzun basın. Ekranı açmak için kısa basın.

### Kısayol menüsü

Telefon bağlantı durumu

Ses Bluetooth değişimi

Şifre

DND modu

Batarya

Menü tipi değişimi

Parlaklık ayarı

Flaş ışığı

# CARMENTA



## **X9 SMARTWATCH USER MANUAL**

# User Manual

English Version



Download the app and  
Scan the QR code to install.




HarmonyOS

|                          |                                         |
|--------------------------|-----------------------------------------|
| <b>Product name</b>      | Smart Watch                             |
| <b>Main control chip</b> | XC2806                                  |
| <b>Radio frequency</b>   | 2.4 G BLE                               |
| <b>Bluetooth version</b> | 5.0                                     |
| <b>Heart sensor</b>      | Epco Micro EM7128                       |
| <b>Energy management</b> | Polymer 3.7 V                           |
| <b>Product size</b>      | 45x38x11mm                              |
| <b>Materials</b>         | Stainless Steel +IML+<br>Tempered Glass |


# Understand Product

1. Press the button on the right for 3 seconds to turn on/off.
2. You can understand the basic structure of the product as shown below.

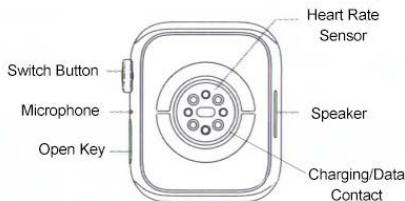

## Charging

1. Put the charging head into the port on the watch (as shown in the picture below) and then plug the USB connector of the charger into a good quality 5V/1A adapter.
2. Some chargers have magnetic attraction, auto-align, or structural alignment. There are magnets in the charging port of the charging cable and the watch. Take care to install with correct alignment.
3. When the charge of the watch is close to zero, it takes 2 hours to fully charge. When the product is first taken out of the box, the battery may be dead. If the product does not turn on, plug it into the charger and charge it for 2 hours. If it still does not turn on after being charged, contact us.



# Waterproof Instructions

The product is splash resistant, but not completely waterproof.

While the watch is on your wrist; It is not recommended to swim. If the product comes into direct contact with water, it is out of warranty. Except for the water of the watch; soap, detergent, shampoo, cream, lotion, alcohol, cleaner and abrasive chemicals etc. If it comes into contact with water, it may deteriorate the waterproofing. Devices that come into contact with such chemicals are out of warranty.

## Basic Use

1. If there is no operation for 10 seconds after the watch is turned on, the screen will automatically turn off and go into sleep mode. (Screen timeout period can be adjusted in "settings-brightness-screen-off time" section.) You can press any key you want to turn on the watch's screen.
2. The watch has a multi-screen interface. To change the screen interface, long click on the home screen, you can switch to the other interface by swiping right and left or rotating the side key. You can use existing interfaces or from within the watch app. You can download by selecting the interface you want.
3. On the main screen, you can activate the "do not disturb" mode by activating the small moon image in the floating screen section.
4. On the main screen, you can enter the "shortcut menu" by swiping down the screen and exit the shortcut menu by swiping up again.
5. On the home screen, swiping right opens the commonly used function bar. (The last used feature can be quickly entered)

**Reminder:** When switching between "phone music", "clock music" or "earphone" on the watch, your phone will be automatically disabled from the bluetooth music feature of the watch. If you switch to the bluetooth music feature again within 5 minutes, your phone will automatically reconnect. (Otherwise, the smart watch will automatically disable the bluetooth music feature within 5 minutes).

**Reminder:** The watch's voice call function is automatically activated when the product is turned on. If it is not paired with your mobile phone's bluetooth for 2 minutes, the watch's voice call feature will be turned off automatically.

## Pairing with Phone

1) Smartphones supported with minimum IOS 9.0 and Android 5.0 can be paired with the smart watch through the app of this smart watch.

**2) Application installation:** Read the following Qr code and download the application to your phone and perform the installation. During app installation or use, please enable all permissions as prompted, otherwise it may affect normal use of app and watch.

**3) Application manual installation:** If you do not want to install by scanning the QR code, you can also install manually. Download the "QiFit" application from your phone's application market. Enter the "My watch" section. Tap on 'Add device'. After your phone makes a bluetooth search, you can establish the connection by selecting your Carmenta smart watch.

You can see the status in the menu whether the connection was successful or not.

## Voice Call Connection

While your watch is on the face screen, swipe down from the top of the screen. Activate it by touching the bluetooth symbol on the left in the top menu of the watch. Then go to bluetooth settings from phone settings. With the feature that says "Audio" at the end connect.

**Note 1 :** In order to make voice calls from your watch, a 2nd Bluetooth connection must be made. You can turn this feature on or off from your watch.

**Note 2 :** If you do not want the media sounds you watch and listen on your phone to come out of your watch; After establishing the voice call connection, tap the arrow on the side. Turn off the "media sound" function at the bottom. Follow the same path to open it whenever you want.

**Contacts Synchronization:** You can transfer your phone book to your smartwatch. Enter the phone app. Tap on the "My Watch" tab. In the "Other settings" section, select "Sync contacts book. After entering the "" section, you can manually select a contact or transfer all your contacts to the watch with the select all feature.

Tip: You can turn the Bluetooth sound off and on in the shortcut menu. In addition to playing phone music only when there is a Bluetooth connection, the watch can make and end calls.

### **Voice Assistant**

You can also open the "Voice" function in the function menu to search with the general voice assistant (for example: Please call \*\*\*\*)

# **Features and Functions**

**Daily activity:** Your smartwatch tracks your activities. your step count, calories, You can track the distance you have traveled.

**Voice call:** The smart watch supports voice calls by establishing a bluetooth connection. By establishing an additional connection with your phone, you can make your calls through the watch.

**Notification:** You can view all notifications and messages coming to your phone from your watch. When your watch is on the face screen, swipe up to access the notification shortcut.

**Clock face:** To change the watch face, press and hold the screen and swipe left/right to make a selection. You can also change the dial by turning the button on the side. You can download the face you want from the phone app or customize your own face.

**Customize:** From the phone app, enter the "Search library" section. Set the image you want to the screen from the "Custom background" section or upload it to your watch by choosing one of the ready-made dials at the bottom.

**Always on display:** The smart watch has an Always on display feature. You can access the watch's interface by swiping down on the dial screen.

**Sport mode:** Your smart watch monitors the sport you have done and presents it to you in analysis. It keeps the analyzes it performs in its own memory, and synchronizes the data it keeps when paired with the phone application.

**Health:** This watch and app provide the user with comprehensive and systematic health and safety functions. However, this watch is not a professional medical device. The relevant test data is for daily reference only and is not used in medical diagnosis.

**Heart rate counter:** The watch is worn tightly on the wrist and measures the heart rate of the wearer.

**Blood oxygen:** The watch is worn tightly on the wrist and measures the wearer's blood oxygen level.

**Sleep screen:** When you fall asleep while wearing the watch on your wrist, it automatically detects your deep/light sleep time from 21:00.

**Water reminder:** Set up a water reminder to receive water reminders.

**Inactivity reminder:** Set a sitting alert and your smartwatch will automatically remind you when you've been inactive for a long time.

**Breathing training:** Inhale and exhale as shown on the smartwatch.

**Automatic Measure:** You can turn on automatic heart rate measurement in - Applications-My watch-Other settings-

**Auxiliary function:** Accessibility features or devices allow you to make better use of the watch. The smart watch and the phone app have many more functions. All you have to do is experience and practice.

**Wrist sensor:** Raise your hand towards your face. The screen will turn on automatically.

**Weather:** See the weather forecast instantly and up-to-date from your watch in sync with the phone app.

**Stopwatch:** Keep time of any activity with the stopwatch feature.

**Alarm:** Set it in the "Properties-Alarm" section. The watch will automatically alert you.

**DND mode:** Mute all calls and notifications with one click.

**Remote Shutter:** Turn on "remote control selfie" from the phone app, then the watch will display the shutter icon on the screen. Click on the clock screen to take photos remotely.

**Find watch:** To turn it on, "Phone app-Other settings-Find time", click the find time tab on the app to find the time, and your watch will vibrate.

**Find phone:** When you click "Features menu-Find phone" on the watch, and "find phone" on the watch to find the phone, your phone will give a vibration and ringtone notification.

**Lock screen:** You can activate the lock screen password from the watch settings.

**Mini game:** 2 built-in mini-games (fun puzzle, tetris)

**Power saving:** Activate the power saving mode, the clock sound will be turned off automatically.

**Calendar:** Access the calendar on your watch.

**Flashlight:** When activated, it makes the watch display white, making it a flashlight.

# NFC Feature

With NFC wireless function, it is mainly used for access control (room, elevator, parking lot entrance, swipe cards, etc.). Related functions, your mobile phone must support NFC and related functional applications.

## 1. Access card feature

This watch is equivalent to an NFC tag that can replace ordinary access cards or access keys.

## 2. NFC shortcuts or other apps

You can also use it to use other NFC-enabled applications on your mobile phone (such as shortcut commands for Apple mobile phones, please refer to the mobile phone's NFC-related instructions and applications for details).

## Key instruction

Short press to turn on the screen. Press the side key to enter the main menu, press again to return. Click to change menu styles in the shortcut menu interface. Turn the side key to zoom the dial and switch functions. Press the side button to return to the general operating screen.

**Open key:** Long press the side button to start the device. Short press to turn on the screen.

### Touch screen operation

shortcut menu-scroll down  
sidebar-swipe right  
function menu - swipe left  
Notification-swipe up

### Shortcut menu

Phone connection status  
Audio Bluetooth exchange  
Password  
DND mode  
Battery  
Menu type change  
brightness adjustment  
Flash light

CARMENTA